

# DBI654IBS

## General description

Turbo Drying™ - Fan assisted moist air extraction  
Style  
Installation type: Built under work top  
Size: XL, 82 cm  
Number of baskets: 3  
15 place settings  
8 Steel™ Construction, SCS+ (Super Cleaning System+)  
Cutlery Flexi Tray with Instant Lift™  
Upper rack type: Premium - two foldable wine shelves, fixed pin rows and one foldable glass support  
Lower rack type: Premium - foldable pin rows  
Cutlery basket

## Construction & Performance

8 Steel™ construction  
Hidden heater  
SCS+ (Super Cleaning System+)  
Sensi Clean™ Sensor - detects the dirtiness level  
Number of spray arms: 3  
Number of spray zones: 9  
Jet Spray™ - extra dishwashing power for tall objects  
Wide Spray™ - extra washing power for pots and pans  
Power Zone™ for the cutlery basket

## Use & Flexibility

15 place settings  
Basket class: Premium  
Number of basket levels: 3  
Cutlery Flexi Tray with Instant Lift™  
Height adjustable upper basket  
Easy sliding telescope rails with ball bearings for the upper basket  
Dense basket wiring in both upper and lower basket  
Easy-to-use cutlery basket  
Internal LED light

## Interaction & Control

Display type: LCD display  
Program names in full text  
Number of programs: 13  
Number of options: 4  
Delayed start: Variable start delay up to 24 hours  
Status LED light  
Digital countdown indicator  
Display and sound feedback settings

## Programs, options and modes


13 programs: Auto wash; Eco wash; Hygiene wash; Time program; Plastic wash; Heavy wash; Rinse and hold; Sanitation wash; Upper half wash; Lower half wash; Crystal glass; Quick Pro wash; Self-cleaning  
High temperature  
Extra dry  
Variable start delay up to 24 hours  
Super rinse  
Time set  
Green mode  
Speed mode  
Night mode  
Intensive mode

## Design & Integration

Kick plate adjustable depth: 30-94 mm  
Front panel adjustable rear foot  
Integrated anti-siphon device  
Niche dimensions (HxWxD): 82 × 60 × 56 cm

## Safety & Maintenance

Aqua Safe™  
Kid Safe™ - panel  
Rinse-aid indication: Notification in display  
Stand by water protection  
Exterior float  
Anti block drain pump

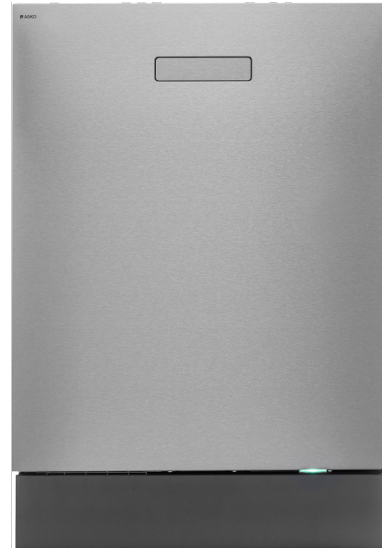

## Technical data

Size: 3/4" Can be connected to hot or cold water  
Max. temperature of inflow water: 70 °C  
Noise level: 42 dB(A)  
Reference program: 1  
Total cycle time of reference program (min): 170 min  
Estimated yearly energy consumption: 295 kWh  
Energy consumption reference program: 0,79 kWh  
Energy stars: 3,5  
Water stars: 5  
Water consumption: 12,2 l  
Consumption in off mode: 0,49 W  
Consumption in standby mode: 0,49 W  
Plug type: Australian  
Connection rating: 2000 W  
Voltage: 220-240 V  
Number of phases: 1  
Current: 10 amp  
Frequency: 50 Hz  
Required inlet water pressure: 0,03-1 MPa  
Net weight: 46 kg  
Yes  
Yes

## Dimensions

Product dimensions (HxWxD): 81,9 × 59,6 × 55,9 cm  
Depth with door open: 1198 mm  
Length electrical cord: 1,825 m  
Length inlet hose: 163 cm  
Length outlet hose: 200 cm

## Logistic information

Dimensions of packed product (HxWxD): 89 × 64 × 68 cm  
Gross weight: 49,3 kg  
Product code: 729066